

10'x10'x8' MANHOLE BOX MANUFACTURER'S TABULATED DATA



"The Barricade Company & Traffic Supply, Inc."
3963 Santa Rosa Ave.
Santa Rosa, CA 95407
Phone: (707) 523-2350
Fax: (707) 523-3124

MODEL NUMBER: 8BCMBJ
SERIAL NUMBER: 524
MAX. PRESSURE CAPACITY: 1,300 PSF

BOX HEIGHT: 8'
BOX WIDTH: 10'
BOX LENGTH: 10'

SPECIFICATIONS FOR USE

1. ALL EXCAVATIONS SHALL BE IN ACCORDANCE WITH OSHA CFR 29, PART 1926, SUBPART P.

2. SOIL SHALL BE CLASSIFIED IN ACCORDANCE WITH OSHA APPENDIX A BY A COMPETENT PERSON, OR BY A REGISTERED CIVIL ENGINEER PRIOR TO INSTALLING THIS EQUIPMENT.

3. ALLOWABLE DEPTH RATINGS BASED ON A MAXIMUM SURCHARGE PRESSURE OF 72 PSF. CERTIFIED DEPTHS WILL BE INVALID IF HEAVY EQUIPMENT OR EXCAVATED SOIL IS PLACED ADJACENT TO SHORING THAT EXCEED THIS SURCHARGE LIMIT.

4. BOTTOM OF BOX MUST NOT BE MORE THAN TWO FEET ABOVE THE EXCAVATION BOTTOM IN ACCORDANCE WITH 29 CFR PART 1926.652(g)(2) OF FEDERAL OSHA.

5. THIS TABULATED DATA IS A GENERAL SET OF GUIDELINES & CHARTS TO ASSIST THE COMPETENT PERSON IN SELECTING A SAFETY SYSTEM WITH PROPER SHORING EQUIPMENT. THE COMPETENT PERSON HAS SOLE RESPONSIBILITY FOR JOB SITE SAFETY & THE PROPER SELECTION OF THE SHORING EQUIPMENT.

6. THIS TABULATED DATA IS NOT INTENDED TO BE USED AS A JOB SPECIFIC EXCAVATION SAFETY PLAN, BUT SHALL BE USED BY THE COMPETENT PERSON TO SUPPLEMENT HIS TRAINING, HIS KNOWLEDGE AND EXPERIENCE OF THE JOB CONDITIONS AND SOIL TYPES.

7. MEANS AND METHODS ASSOCIATED WITH THE EXCAVATION, AND INSTALLATION & REMOVAL OF THE SHORING SYSTEM ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

8. CERTIFICATION IS NOT VALID IF SHIELD IS MODIFIED IN ANY MANNER BY ATTACHING, WELDING OR RESTING ANY OTHER SHIELDS OR PLATE TO EXTEND THE SPECIFIED HEIGHT, LENGTH, OR CLEARANCE OUTLINED ABOVE.

9. CERTIFICATION IS NOT VALID IF THE SHORING SYSTEM SHOWS EXCESSIVE WEAR, IS PERMANENTLY DAMAGED, IS NOT MAINTAINED OR REPAIRED PROPERLY.

10. GROUND WATER LEVEL MUST BE LOCATED OR DRAWN DOWN TO BELOW BASE OF EXCAVATION, OTHERWISE SOIL MUST BE CLASSIFIED AS TYPE C-80.

11. BOX SHALL BE INSTALLED IN A MANNER THAT WILL RESTRICT LATERAL OR OTHER HAZARDOUS MOVEMENT OF THE SHIELD IN THE EVENT OF THE APPLICATION OF SUDDEN LOAD, AND IS NOT INTENDED TO PROVIDE SUPPORT OR PROTECTION TO ADJACENT STRUCTURES.

12. NO STEEL PLATES, SHEET PILES, OR SHEATHING OF ANY KIND MAY BE LEANED AGAINST, OR OTHERWISE SUPPORTED BY THE MANHOLE BOX AT ANY TIME.

13. CAPACITY AND DEPTH RATINGS ACCOUNT FOR 33% OVERSTRESS FOR SHORT-TERM LOADING CONDITION.


MAXIMUM ALLOWABLE TRENCH SHIELD DEPTH "D" PER SOIL TYPES:

TYPE A	35'
TYPE B	30'
TYPE C-60	25'
TYPE C-80	19'

THE SOIL TYPE SHALL BE CLASSIFIED BY A COMPETENT PERSON PER FEDERAL OSHA CONSTRUCTION SAFETY ORDERS, CFR 29 APPENDIX A.

DEPTH RATINGS ACCOUNT FOR 72 PSF MINIMUM OSHA SURCHARGE.

SLOPE

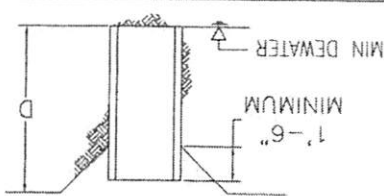

CERTIFIED BY:
MUST BE SIGNED
& DATED



D.H. CHARLES ENGINEERING, INC.
4706 Hoen Avenue
Santa Rosa, CA 95405
Ph: (707) 537-8282 Fax: (707) 537-8338